




ELUMA LED 4 & 8K LOW LEVEL SPECIFICATIONS

eluma™

a new generation of intelligent lighting

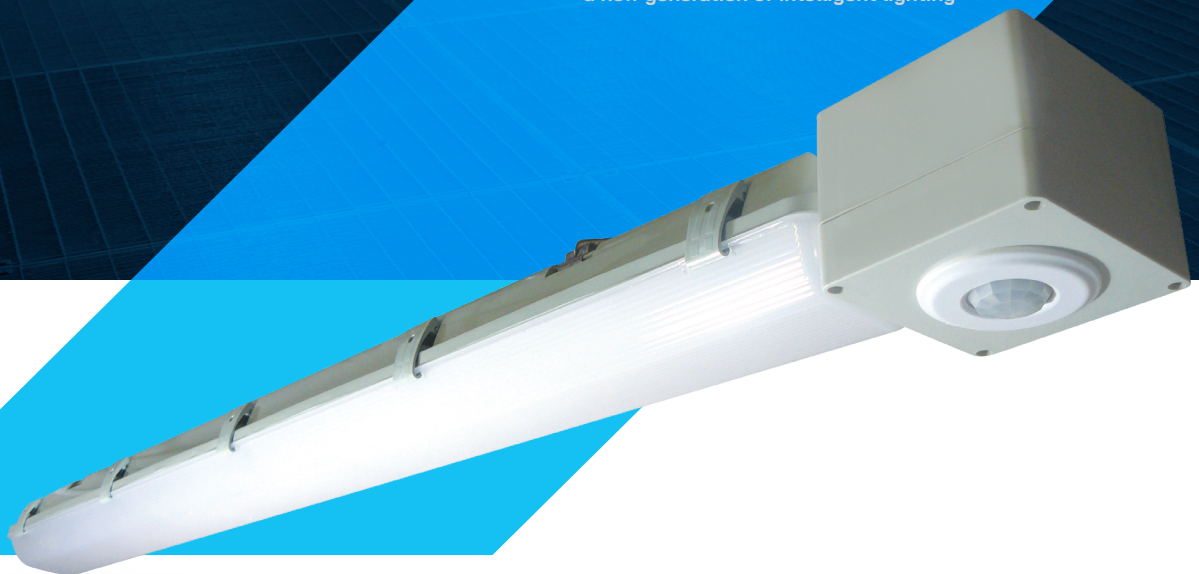



Energy Efficient LED Luminaire For Low Level Applications

Model; Eluma LED 4K & 8K Low Level

The Eluma LED 4-8K range is designed to be installed in heights to 3 metres. The range includes the Atmos lighting controls that include PIR, Dimming, Maintain Light Level, Multi-Level Settings and variable sensitivity, for providing optimum energy management whilst maintaining compliant minimum lighting levels. Different optics enables optimised and high efficient lighting for different applications.

GENERAL TECHNICAL SPECIFICATIONS - 4K

Lumens	4,000
Power	40W
Supply Voltage	220-240
Frequency	50Hz
Light Colour	840
IP Rating	IP 54
Diffuser	PMMA
Number of LED Modules	2 (Philips Fortimo)
Dimming	DALI 1% to 100%
Emergency Available	Yes (Philips Trust Sight)
Sensor Control	Atmos: Daylight Harvesting
Housing Material	Standard Plastic Lighting
Minimum LED Lifespan	50,000 hrs
Maximum Ambient Temperature	30°
Standard Warranty	5 Years
Weight	2.5kg

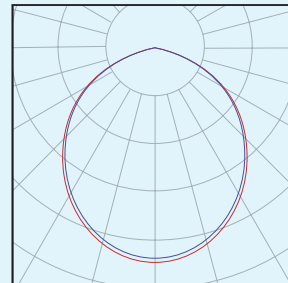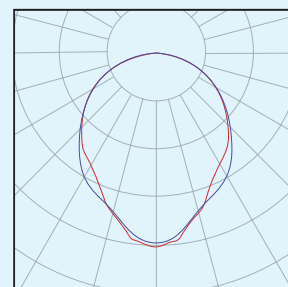

GENERAL TECHNICAL SPECIFICATIONS - 8K


Lumens	8,000
Power	60W
Supply Voltage	220-240
Frequency	50Hz
Light Colour	840
IP Rating	IP 54
Diffuser	PMMA
Number of LED Modules	2 (Philips Fortimo)
Dimming	DALI On Board Sensor
Emergency Available	Yes (Philips Trust Sight)
Sensor Control	Atmos: Daylight Harvesting
Housing Material	Standard Plastic Lighting
Minimum LED Lifespan	50,000 hrs
Maximum Ambient Temperature	30°
Standard Warranty	5 Years
Weight	2.5kg



GENERAL TECHNICAL SPECIFICATIONS

Ref. Options	Wattage	Dimensions (mm)			Weight Kg
		L	W	H	
Eluma 4K	40W	1400	120	90	2.5
Eluma 8K	70W	1400	120	90	2.5

WALK ACROSS		WALK TOWARDS	
Height	Height Range Diameter	Height	Height Range Diameter
3 m	9 m	4 m	10 m

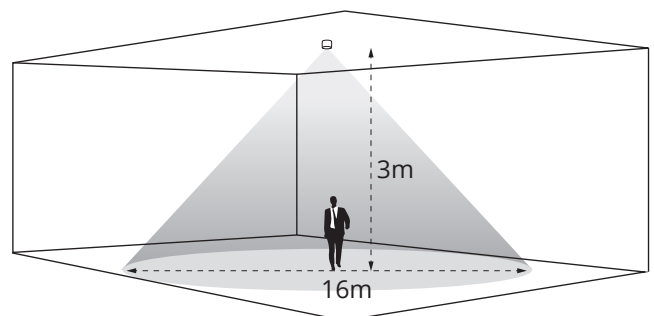

TECHNOLOGY FOR AN ENERGY EFFICIENT WORLD

Unit 1 • Victoria Business Park • Roche • St Austell • PL26 8LX

t +44 (0)1872 248 414 Eluma LED 4 & 8K LL
info@suresense.co.uk 12/2019
Issue No: 04

suresense.co.uk